


VKDOM/CE 24 V AC/DC - Valvola a sfera a 2 vie DUAL BLOCK® a comando elettrico DN 10:50

Valvola a sfera DUAL BLOCK® con flange fisse EN/ISO/DIN PN 10/16, scartamento secondo EN 558-1 con attuatore elettrico 24 V AC/DC.

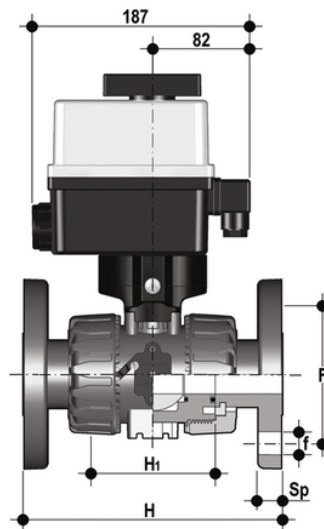

EPDM

Codice	d	DN	PN	H	H	F	f	U	Sp	g
VKDOMEL020E	20	15	10	130	65	65	14	4	11	1715
VKDOMEL025E	25	20	10	150	70	75	14	4	14	1791
VKDOMEL032E	32	25	10	160	78	85	14	4	14	1871
VKDOMEL040E	40	32	10	180	88	100	18	4	14	2156
VKDOMEL050E	50	40	10	200	93	110	18	4	16	2358
VKDOMEL063E	63	50	10	230	111	125	18	4	16	2807

FKM

Codice	d	DN	PN	H	H	F	f	U	Sp	g
VKDOMEL020F	20	15	10	130	65	65	14	4	11	1715
VKDOMEL025F	25	20	10	150	70	75	14	4	14	1791
VKDOMEL032F	32	25	10	160	78	85	14	4	14	1871
VKDOMEL040F	40	32	10	180	88	100	18	4	14	2156
VKDOMEL050F	50	40	10	200	93	110	18	4	16	2358
VKDOMEL063F	63	50	10	230	111	125	18	4	16	2807