


TKDDV/CE 90-240 V AC - Valvola a sfera a 3 vie DUAL BLOCK® a comando elettrico DN 10:50

Valvola a sfera a 3 vie DUAL BLOCK® con attacchi maschio metrici con attuatore elettrico multivolt 90-240 V AC 50-60 Hz. Sfera a "T", configurazione 1.

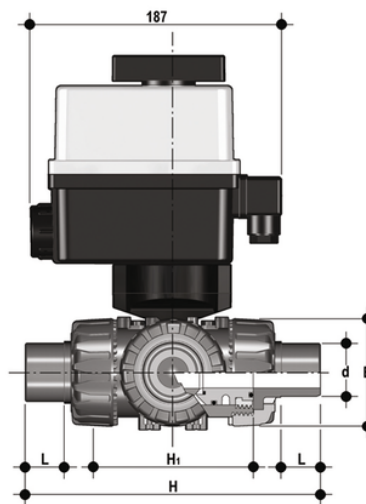

EPDM

Codice	d	DN	PN	E	H	H	L	g
TKDDVEM020E1	20	15	16	54	140	80	16	1843
TKDDVEM025E1	25	20	16	65	175	100	19	2076
TKDDVEM032E1	32	25	16	73	188	110	22	2299
TKDDVEM040E1	40	32	16	86	220	131	26	2880
TKDDVEM050E1	50	40	16	98	251	148	31	3242
TKDDVEM063E1	63	50	*10	122	294	179	38	4362

FKM

Codice	d	DN	PN	E	H	H	L	g
TKDDVEM020F1	20	15	16	54	140	80	16	1843
TKDDVEM025F1	25	20	16	65	175	100	19	2076
TKDDVEM032F1	32	25	16	73	188	110	22	2299
TKDDVEM040F1	40	32	16	86	220	131	26	2880
TKDDVEM050F1	50	40	16	98	251	148	31	3242
TKDDVEM063F1	63	50	*10	122	294	179	38	4362