


TKDFV/CP SA - Valvola a sfera a 3 vie DUAL BLOCK® a comando pneumatico DN 10:50

Valvola a 3 vie DUAL BLOCK® con attacchi femmina filettatura cilindrica gas con attuatore pneumatico, funzione Semplice Effetto sfera a "T", configurazione 1.

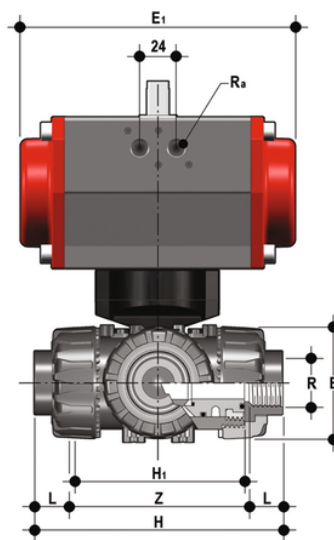

EPDM

Codice	R	DN	PN	E	H	H	L	Z	R _a	E ₁	g
TKDFVSA038E1	3/8"	10	16	54	118	80	11,4	95	G1/8"	138	1543
TKDFVSA012E1	1/2"	15	16	54	125	80	15	95	G1/8"	138	2143
TKDFVSA034E1	3/4"	20	16	65	146	100	16,3	114	G1/4"	155,5	2386
TKDFVSA100E1	1"	25	16	73	166	110	19,1	129	G1/4"	155,5	2659
TKDFVSA114E1	1" 1/4	32	16	86	195,5	131	21,4	151	G1/4"	155,5	3113
TKDFVSA112E1	1" 1/2	40	16	98	211	148	21,4	166	G1/4"	155,5	3460
TKDFVSA200E1	2"	50	16	122	253,5	179	25,7	199	G1/4"	210	6154

FKM

Codice	R	DN	PN	E	H	H	L	Z	R _a	E ₁	g
TKDFVSA038F1	3/8"	10	16	54	118	80	11,4	95	G1/8"	138	1543
TKDFVSA012F1	1/2"	15	16	54	125	80	15	95	G1/8"	138	2143
TKDFVSA034F1	3/4"	20	16	65	146	100	16,3	114	G1/4"	155,5	2386
TKDFVSA100F1	1"	25	16	73	166	110	19,1	129	G1/4"	155,5	2659
TKDFVSA114F1	1" 1/4	32	16	86	195,5	131	21,4	151	G1/4"	155,5	3113

TKDFV/CP SA – Valvola a sfera a 3 vie DUAL BLOCK® a comando pneumatico DN 10:50

Codice	R	DN	PN	E	H	H	L	Z	R _a	E ₁	g
TKDFVSA112F1	1" 1/2	40	16	98	211	148	21,4	166	G1/4"	155,5	3460
TKDFVSA200F1	2"	50	16	122	253,5	179	25,7	199	G1/4"	210	6154