


TKDDC/CE 24 V AC/DC - Valvola a sfera a 3 vie DUAL BLOCK® a comando elettrico DN 10:50

Valvola a sfera a 3 vie DUAL BLOCK® con attacchi maschio metrici con attuatore elettrico 24 V AC/DC. Sfera a "T", configurazione 1.

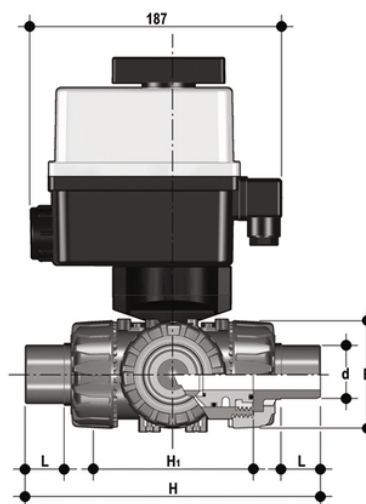

EPDM

Codice	d	DN	PN	E	H	H	L	g
TKDDCELO20E1	20	15	16	54	140	80	16	1872
TKDDCELO25E1	25	20	16	65	175	100	19	2126
TKDDCELO32E1	32	25	16	73	188	110	22	2372
TKDDCELO40E1	40	32	16	86	220	131	26	2992
TKDDCELO50E1	50	40	16	98	251	148	31	3392
TKDDCELO63E1	63	50	*10	122	294	179	38	4622

FKM

Codice	d	DN	PN	E	H	H	L	g
TKDDCELO20F1	20	15	16	54	140	80	16	1872
TKDDCELO25F1	25	20	16	65	175	100	19	2126
TKDDCELO32F1	32	25	16	73	188	110	22	2372
TKDDCELO40F1	40	32	16	86	220	131	26	2992
TKDDCELO50F1	50	40	16	98	251	148	31	3392
TKDDCELO63F1	63	50	*10	122	294	179	38	4622