


# TKDNV/CP SA – Valvola a sfera a 3 vie DUAL BLOCK® a comando pneumatico DN 10:50

Valvola a sfera a 3 vie DUAL BLOCK® con attacchi femmina, filettatura NPT con attuatore pneumatico, funzione Semplice Effetto. Sfera a "T", configurazione 1.

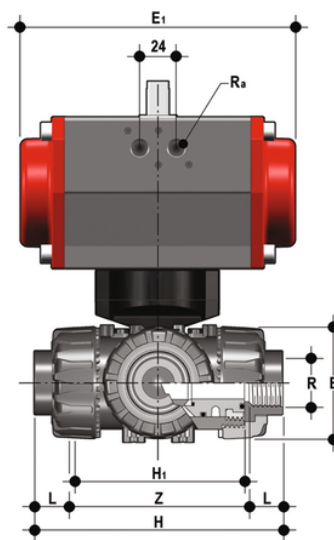

## EPDM

Codice	R	DN	PN	E	H	H	L	Z	R <sub>a</sub>	E <sub>1</sub>	g
TKDNVSA038E1	3/8"	10	16	54	118	80	13,7	90,6	G1/8"	138	1543
TKDNVSA012E1	1/2"	15	16	54	126	80	18	90,4	G1/8"	138	2143
TKDNVSA034E1	3/4"	20	16	65	146,4	100	18	110,4	G1/4"	155,5	2386
TKDNVSA100E1	1"	25	16	73	166,6	110	22,6	121,4	G1/4"	155,5	2659
TKDNVSA114E1	1" 1/4	32	16	86	195,8	131	25,1	145,6	G1/4"	155,5	3113
TKDNVSA112E1	1" 1/2	40	16	98	211,4	148	24,7	162	G1/4"	155,5	3460
TKDNVSA200E1	2"	50	16	122	253,8	179	29,6	194,6	G1/4"	210	6154

## FKM

Codice	R	DN	PN	E	H	H	L	Z	R <sub>a</sub>	E <sub>1</sub>	g
TKDNVSA038F1	3/8"	10	16	54	118	80	13,7	90,6	G1/8"	138	1543
TKDNVSA012F1	1/2"	15	16	54	126	80	18	90,4	G1/8"	138	2143
TKDNVSA034F1	3/4"	20	16	65	146,4	100	18	110,4	G1/4"	155,5	2386
TKDNVSA100F1	1"	25	16	73	166,6	110	22,6	121,4	G1/4"	155,5	2659
TKDNVSA114F1	1" 1/4	32	16	86	195,8	131	25,1	145,6	G1/4"	155,5	3113

# TKDNV/CP SA – Valvola a sfera a 3 vie DUAL BLOCK® a comando pneumatico DN 10:50

Codice	R	DN	PN	E	H	H	L	Z	R <sub>G</sub>	E <sub>1</sub>	g
TKDNVSA112F1	1" 1/2	40	16	98	211,4	148	24,7	162	G1/4"	155,5	3460
TKDNVSA200F1	2"	50	16	122	253,8	179	29,6	194,6	G1/4"	210	6154