


TKDGV/CP DA – Valvola a sfera a 3 vie DUAL BLOCK® a comando pneumatico DN 10:50

Valvola a sfera a 3 vie DUAL BLOCK® con attacchi femmina, filettatura JIS funzione Doppio Effetto. Sfera a "T", configurazione 1.

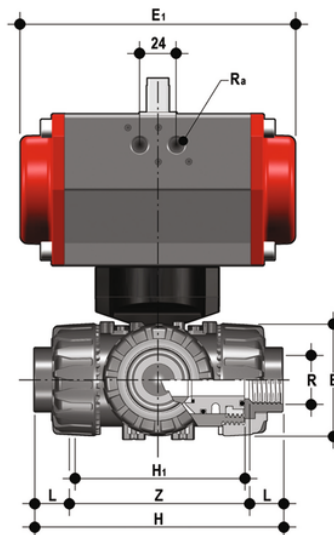

EPDM

Codice	R	DN	PN	E	H	H	L	Z	R _a	E ₁	g
TKDGVDA012E1	1/2"	15	16	54	118	80	16	86	G1/8"	138	1943
TKDGVDA034E1	3/4"	20	16	65	144,8	100	19	106,8	G1/4"	155,5	2186
TKDGVDA100E1	1"	25	16	73	160	110	22	116	G1/4"	155,5	2409
TKDGVDA114E1	1" 1/4	32	16	86	188,6	131	25	138,6	G1/4"	155,5	2913
TKDGVDA112E1	1" 1/2	40	16	98	219,4	148	26	167,4	G1/4"	155,5	3260
TKDGVDA200E1	2"	50	16	122	166,6	179	31	204,6	G1/4"	155,5	5684

FKM

Codice	R	DN	PN	E	H	H	L	Z	R _a	E ₁	g
TKDGVDA012F1	1/2"	15	16	54	118	80	16	86	G1/8"	138	1943
TKDGVDA034F1	3/4"	20	16	65	144,8	100	19	106,8	G1/4"	155,5	2186
TKDGVDA100F1	1"	25	16	73	160	110	22	116	G1/4"	155,5	2409
TKDGVDA114F1	1" 1/4	32	16	86	188,6	131	25	138,6	G1/4"	155,5	2913
TKDGVDA112F1	1" 1/2	40	16	98	219,4	148	26	167,4	G1/4"	155,5	3260
TKDGVDA200F1	2"	50	16	122	166,6	179	31	204,6	G1/4"	155,5	5684