


VKDOC/CE 90-240 V AC - valvola a sfera a 2 vie DUAL BLOCK® a comando elettrico DN 10:50

Valvola a sfera DUAL BLOCK® con flange fisse, foratura EN/ISO/DIN PN 10/16, scartamento secondo EN 558-1 con attuatore elettrico multivolt 90-240 V AC 50-60 Hz.

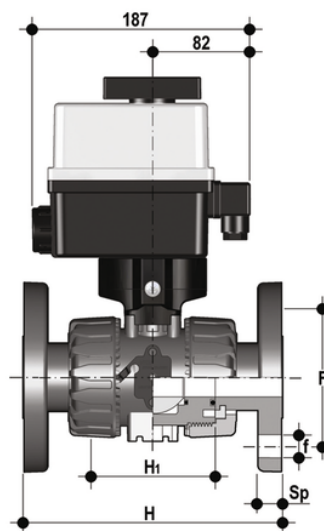

EPDM

Codice	d	DN	PN	H	H	F	f	U	Sp	g
VKDOCEM020E	20	15	16	130	65	65	14	4	11	1792
VKDOCEM025E	25	20	16	150	70	75	14	4	13,5	1923
VKDOCEM032E	32	25	16	160	78	85	14	4	14	2043
VKDOCEM040E	40	32	16	180	88	100	18	4	14	2400
VKDOCEM050E	50	40	16	200	93	110	18	4	16	2688
VKDOCEM063E	63	50	*10	230	111	125	18	4	16	3311

FKM

Codice	d	DN	PN	H	H	F	f	U	Sp	g
VKDOCEM020F	20	15	16	130	65	65	14	4	11	1792
VKDOCEM025F	25	20	16	150	70	75	14	4	13,5	1923
VKDOCEM032F	32	25	16	160	78	85	14	4	14	2043
VKDOCEM040F	40	32	16	180	88	100	18	4	14	2400
VKDOCEM050F	50	40	16	200	93	110	18	4	16	2688
VKDOCEM063F	63	50	*10	230	111	125	18	4	16	3311