


TKDGV/CP SA - Valvola a sfera a 3 vie DUAL BLOCK® a comando pneumatico DN 10:50

Valvola a sfera a 3 vie DUAL BLOCK® con attacchi femmina, filettatura JIS funzione Semplice Effetto. Sfera a "T", configurazione 1.

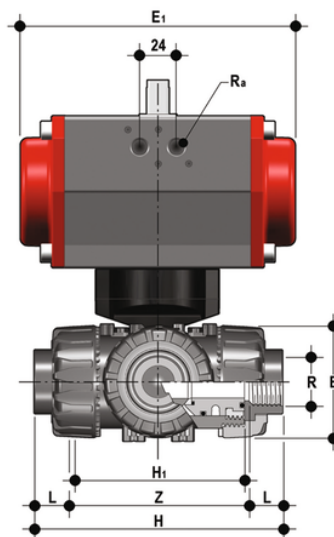

EPDM

Codice	R	DN	PN	E	H	H	L	Z	R _a	E ₁	g
TKDGVSA012E1	1/2"	15	16	54	118	80	16	86	G1/8"	138	2143
TKDGVSA034E1	3/4"	20	16	65	144,8	100	19	106,8	G1/4"	155,5	2386
TKDGVSA100E1	1"	25	16	73	160	110	22	116	G1/4"	155,5	2659
TKDGVSA114E1	1" 1/4	32	16	86	188,6	131	25	138,6	G1/4"	155,5	3113
TKDGVSA112E1	1" 1/2	40	16	98	219,4	148	26	167,4	G1/4"	155,5	3460
TKDGVSA200E1	2"	50	16	122	166,6	179	31	204,6	G1/4"	210	6154

FKM

Codice	R	DN	PN	E	H	H	L	Z	R _a	E ₁	g
TKDGVSA012F1	1/2"	15	16	54	118	80	16	86	G1/8"	138	2143
TKDGVSA034F1	3/4"	20	16	65	144,8	100	19	106,8	G1/4"	155,5	2386
TKDGVSA100F1	1"	25	16	73	160	110	22	116	G1/4"	155,5	2659
TKDGVSA114F1	1" 1/4	32	16	86	188,6	131	25	138,6	G1/4"	155,5	3113
TKDGVSA112F1	1" 1/2	40	16	98	219,4	148	26	167,4	G1/4"	155,5	3460
TKDGVSA200F1	2"	50	16	122	166,6	179	31	204,6	G1/4"	210	6154