


VKDOC/CE 24 V AC/DC - Valvola a sfera a 2 vie DUAL BLOCK® a comando elettrico DN 10:50

Valvola a sfera DUAL BLOCK® con flange fisse, foratura EN/ISO/DIN PN 10/16, scartamento secondo EN 558-1 con attuatore elettrico 24 V AC/DC.

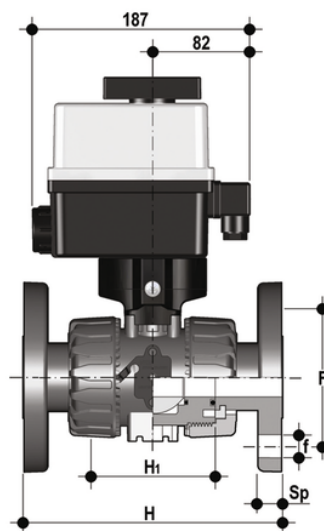

EPDM

Codice	d	DN	PN	H	H	F	f	U	Sp	g
VKDOCELO20E	20	15	16	130	65	65	14	4	11	1792
VKDOCELO25E	25	20	16	150	70	75	14	4	13,5	1923
VKDOCELO32E	32	25	16	160	78	85	14	4	14	2043
VKDOCELO40E	40	32	16	180	88	100	18	4	14	2400
VKDOCELO50E	50	40	16	200	93	110	18	4	16	2688
VKDOCELO63E	63	50	*10	230	111	125	18	4	16	3311

FKM

Codice	d	DN	PN	H	H	F	f	U	Sp	g
VKDOCELO20F	20	15	16	130	65	65	14	4	11	1792
VKDOCELO25F	25	20	16	150	70	75	14	4	13,5	1923
VKDOCELO32F	32	25	16	160	78	85	14	4	14	2043
VKDOCELO40F	40	32	16	180	88	100	18	4	14	2400
VKDOCELO50F	50	40	16	200	93	110	18	4	16	2688
VKDOCELO63F	63	50	*10	230	111	125	18	4	16	3311