


# TKDIV/CE 24 V AC/DC - Valvola a sfera a 3 vie DUAL BLOCK® a comando elettrico DN 10:50

Valvola a 3 vie DUAL BLOCK® con attacchi femmina metrici con attuatore elettrico 24 V AC/DC sfera a "T", configurazione 1.

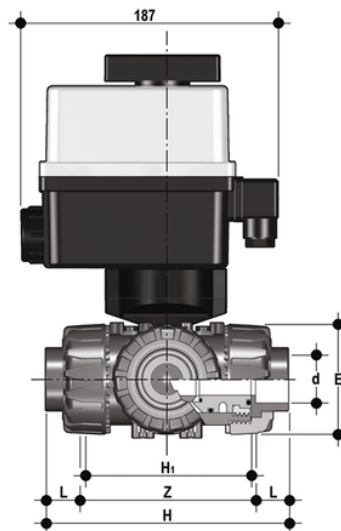

## EPDM

Codice	d	DN	PN	E	H	H	L	Z	g
TKDIVELO20E1	20	15	16	54	118	80	16	86	1843
TKDIVELO25E1	25	20	16	65	145	100	19	107	2076
TKDIVELO32E1	32	25	16	73	160	110	22	116	2299
TKDIVELO40E1	40	32	16	86	188,5	131	26	136,5	2880
TKDIVELO50E1	50	40	16	98	219	148	31	157	3242
TKDIVELO63E1	63	50	*10	122	266,5	179	38	190,5	4362
TKDIVELO16E1	16	10	16	54	118	80	14	90	1843

## FKM

Codice	d	DN	PN	E	H	H	L	Z	g
TKDIVELO16F1	16	10	16	54	118	80	14	90	1843
TKDIVELO20F1	20	15	16	54	118	80	16	86	1843
TKDIVELO25F1	25	20	16	65	145	100	19	107	2076
TKDIVELO32F1	32	25	16	73	160	110	22	116	2299
TKDIVELO40F1	40	32	16	86	188,5	131	26	136,5	2880
TKDIVELO50F1	50	40	16	98	219	148	31	157	3242
TKDIVELO63F1	63	50	*10	122	266,5	179	38	190,5	4362