


RBM PN10 SDR 11 - S 5 - Riduzione

Riduzione concentrica codolo corto per saldatura di testa PN10 SDR 11 - S 5.

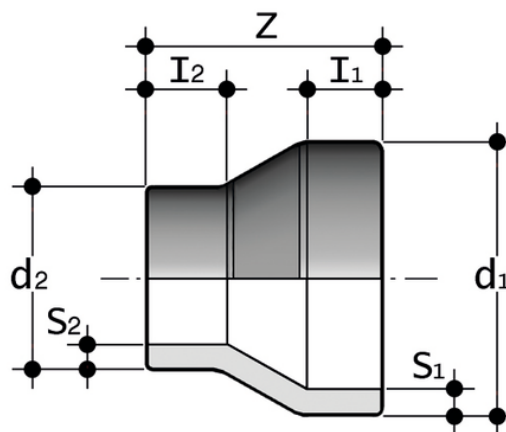

Codice	d ₁	d ₂	l ₁	l ₂	Z	S ₁	S ₂	g
RBM11025020	25	20	12	12	37	2,3	1,9	5
RBM11032020	32	20	12	12	43	2,9	1,9	8
RBM11032025	32	25	12	12	43	2,9	2,3	10
RBM11040020	40	20	12	12	50	3,7	1,9	13
RBM11040025	40	25	12	12	50	3,7	2,3	15
RBM11040032	40	32	12	12	50	3,7	3,0	18
RBM11050025	50	25	12	12	55	4,6	2,3	23
RBM11050032	50	32	12	12	55	4,6	3,0	25
RBM11050040	50	40	12	12	55	4,6	3,7	29
RBM11063032	*63	32	27	25	89	5,8	2,9	67
RBM11063040	63	40	16	12	65	5,8	3,7	50
RBM11063050	*63	50	25	25	87	5,8	4,6	79
RBM11075050	*75	50	19	14	59	6,8	4,6	70
RBM11075063	*75	63	25	26	89	6,8	5,8	112
RBM11090050	*90	50	28	25	93	8,2	4,6	145
RBM11090063	90	63	22	16	80	8,2	5,8	129
RBM11090075	*90	75	31	26	90	8,2	6,8	174
RBM11110050	*110	50	28	20	96	10	4,6	210
RBM11110063	110	63	28	16	97	10,0	5,8	200
RBM11110075	*110	75	40	28	96	10,0	6,8	263

RBM PN10 SDR 11 - S 5 - Riduzione

Codice	d ₁	d ₂	h ₁	h ₂	Z	S ₁	S ₂	g
RBM11110090	*110	90	41	40	105	10,0	8,2	280
RBM11125110	*125	110	40	40	100	11,4	10	380
RBM11140090	*140	90	50	40	130	12,7	8,2	530
RBM11140110	*140	110	50	40	120	12,7	10,0	540
RBM11140125	*140	125	35	32	115	12,7	11,4	600
RBM11160090	*160	90	48	34	141	14,6	8,2	695
RBM11160110	160	110	40	28	124	14,6	10,0	430
RBM11160125	*160	125	40	32	122	14,6	11,4	725
RBM11160140	*160	140	49	38	125	14,6	12,7	725
RBM11200160	200	160	50	40	151	18,2	14,6	700
RBM11225140	*225	140	61	48	157	20,5	12,7	1575
RBM11225160	225	160	55	40	171	20,5	14,6	960
RBM11280200	*280	200	75	54	214	25,4	18,2	3450
RBM11280225	*280	225	72	57	203	25,4	20,5	3425
RBM11315200	*315	200	80	50	200	28,6	18,2	4000
RBM11315225	*315	225	84	60	237	28,6	20,5	5110
RBM11315250	*315	250	86	63	231	28,6	22,7	5105
RBM11315280	*315	280	80	70	222	28,6	25,4	5130
RBM11355200	*355	200	57	40	160	32,3	18,2	5300
RBM11355225	*355	225	67	40	150	32,2	20,5	5000
RBM11355250	*355	250	59	40	135	32,2	22,7	4400
RBM11355280	*355	280	52	40	120	32,2	25,4	3900
RBM11355315	*355	315	48	40	105	32,2	28,6	3400
RBM11400225	*400	225	79	40	175	36,3	20,5	7700
RBM11400250	*400	250	71	40	160	36,3	22,7	6800
RBM11400280	*400	280	64	40	145	36,3	25,4	6100
RBM11400315	*400	315	60	40	130	36,3	28,6	5600
RBM11400355	*400	355	51	40	110	36,3	32,2	4600
RBM11450280	*450	280	80	40	175	40,9	25,4	9800
RBM11450315	*450	315	70	40	155	40,9	28,6	8400
RBM11450355	*450	355	62	40	135	40,9	32,2	7200
RBM11450400	*450	400	55	40	115	40,9	36,3	6200
RBM11500315	*500	315	85	40	185	45,4	28,6	13000
RBM11500355	*500	355	77	40	165	45,4	32,2	11400
RBM11500400	*500	400	65	40	140	45,4	36,3	9400
RBM11500450	*500	450	55	40	115	45,4	40,9	7600