


# Pressure pipe PVC-U PN6 bicchierato

Tubo a pressione PVC-U PN6 bicchierato UNI EN ISO 1452-2, Grigio RAL 7011, lunghezza 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK® pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
  - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
  - **Coupling:** Forsheda 601 POWER-LOCK® Gasket
- **Reference standards**
  - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
  - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
  - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

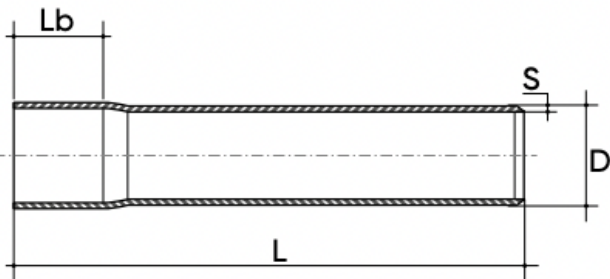

Reference	D (mm)	S (mm)	Lb (mm)	Weight (kg/m)	Qty x pallet
PIPEV26040I6L	40	1.5	70	0.29	275
PIPEV33050I6L	50	1.6	85	0.39	194
PIPEV33063I6L	63	2	90	0.60	123
PIPEV33075I6L	75	2.3	105	0.83	87
PIPEV3309006L	90	2.8	130	1.15	96
PIPEV41110I6L	110	2.7	140	1.42	57
PIPEV41125I6L	125	3.1	150	1.86	51
PIPEV41140I6L	140	3.5	165	2.36	45
PIPEV41160I6L	160	4	175	3.08	33
PIPEV41180I6L	180	4.4	180	3.78	28
PIPEV41200I6L	200	4.9	200	4.66	20
PIPEV41225I6L	225	5.5	215	5.89	18
PIPEV41250I6L	250	6.2	200	7.31	12

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



# Pressure pipe PVC-U PN6 bicchierato

Reference	D (mm)	S (mm)	Lb (mm)	Weight (kg/m)	Qty x pallet
PIPEV41280I6L	280	6.9	200	9.12	11
PIPEV41315I6L	315	7.7	240	11.45	9
PIPEV41355I6L	355	8.7	280	14.71	6
PIPEV41400I6L	400	9.8	280	18.45	5
PIPEV41500I6L	500	12.3	350	28.82	2

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

