


PE 11.94.511

Bend 90°, PE 100, SDR 11, short

- molded
- for heating element butt welding and IR welding
- GKE with 8 45° auxiliary markings for precise installation
- Continuous wall thickness
- R approx. 1 x de

Series of short and long fittings designed for conveying fluids under pressure for butt welding and electrofusion applications.

- Size range: d 12 ÷ d 800 (mm)
- Nominal pressure: SDR 17 (PN10) with water at 20 °C, SDR 11 (PN16) with water at 20 °C
- Temperature range: -40 °C ÷ 60 °C
- Coupling standards - Reference standards:
 - Welding: EN ISO 15494. Can be coupled to pipes according to EN ISO 15494
 - Flanging system: ISO 7005-1, EN 1092-1, EN ISO 15494, ANSI B16.5 cl.150
 - Construction criteria: UNI EN ISO 15494
 - Test methods and requirements: UNI EN ISO 15494
 - Installation criteria: DVS 2202-1, DVS 2207-1, UNI EN 12201- 3, UNI 10520, ISO 21307, UNI 10521, UNI EN 1555-3, ISO 4427- 3, ISO 4437-3
- Fitting material: PE-HD
- Seal material: EPDM, FKM

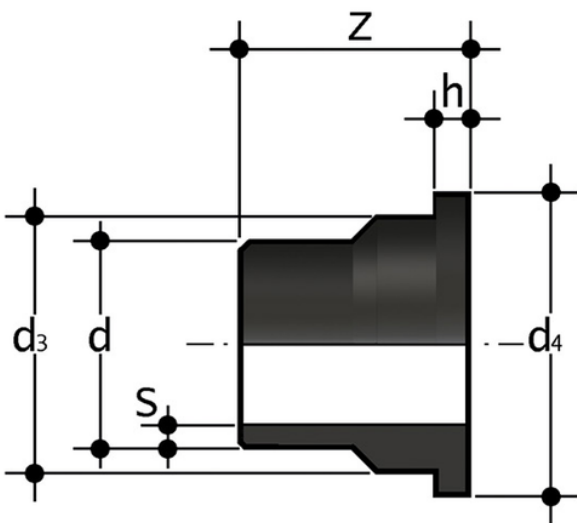

Reference	d	Z	h	d ₃	d ₄	S	g
QBBEC11020	20	54	5	27,4	30	1,9	12
QBBEC11025	25	54	6	35,9	38,5	2,3	20
QBBEC11032	32	54	6	41,4	44,5	2,9	25
QBBEC11040	40	54	7	52,8	56,2	3,7	45
QBBEC11050	50	54	7	58,8	62,2	4,6	53

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



PE 11.94.511

Bend 90°, PE 100, SDR 11, short

Reference	d	Z	h	d ₃	d ₄	S	g
QBBEC11063	63	54	8	73,8	78,3	5,8	89

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

