


# POWER-LOCK VDA® PN10 - 30° bend

VDA® pressure POWER-LOCK bend, Blu Ral 5010, 30 DEGREES, connection FORSHEDA 601 POWER-LOCK®.

VDA® curves produced from certified pipes with pre-installed hot seal FORSHEDA 601 POWER-LOCK®.

- **Size range:** d 63 ÷ 400 (mm); Degrees: 30°
- **Nominal pressure:** PN10
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards:** FORSHEDA JOINT, gluing on request
- **Reference standards:** Curves produced from certified pipes:
  - KQ KIWA QUALITY KIP-105133- BSPAS27
  - D.M. No.174/2004-potability
  - UNIEN 1622- smell and taste threshold
- **Bend material:** PVC-A colour BLUE RAL 5010

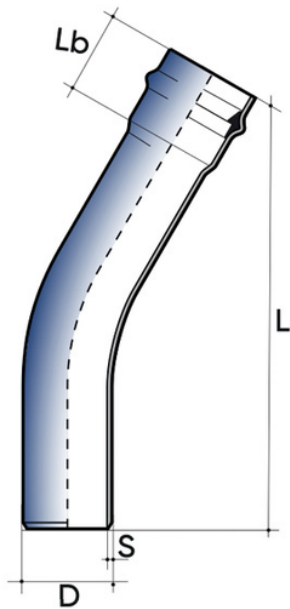

Reference	D (mm)	S (mm)	Lb (mm)	Qty x pallet
PBVDAPN10063F3L	63	2.1	110	80
PBVDAPN10075F3L	75	2.3	120	80
PBVDAPN10090F3L	90	2.6	130	80
PBVDAPN10110F3L	110	3.1	130	60
PBVDAPN10125F3L	125	3.5	150	45
PBVDAPN10140F3L	140	3.9	160	35
PBVDAPN10160F3L	160	4.5	165	25
PBVDAPN10200F3L	200	5.6	180	*
PBVDAPN10225F3L	225	6.3	200	*
PBVDAPN10250F3L	250	7.0	210	*
PBVDAPN10280F3L	280	7.8	210	*

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



# POWER-LOCK VDA® PN10 - 30° bend

Reference	D (mm)	S (mm)	Lb (mm)	Qty x pallet
PBVDAPN10315F3L	315	8.8	230	*
PBVDAPN10355F3L	355	9.9	250	*
PBVDAPN10400F3L	400	11.2	250	*

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

