


POWER-LOCK VDA® PN16 – 11° bend

VDA® pressure POWER-LOCK bend, Blu Ral 5010, 11 DEGREES, connection FORSHEDA 601 POWER-LOCK®.

VDA® curves produced from certified pipes with pre-installed hot seal FORSHEDA 601 POWER-LOCK®.

- **Size range:** d 63 ÷ 400 (mm); Degrees: 11°
- **Nominal pressure:** PN16
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards:** FORSHEDA JOINT, gluing on request
- **Reference standards:** Curves produced from certified pipes:
 - KQ KIWA QUALITY KIP-105133- BSPAS27
 - D.M. No.174/2004-potability
 - UNIEN 1622- smell and taste threshold
- **Bend material:** PVC-A colour BLUE RAL 5010

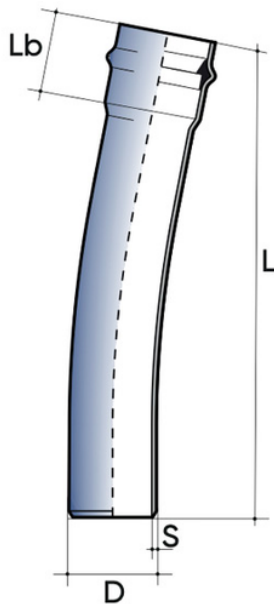

Reference	D (mm)	S (mm)	Lb (mm)	Qty x pallet
PBVDAPN16063F1L	63	3.2	110	80
PBVDAPN16075F1L	75	3.7	120	80
PBVDAPN16090F1L	90	4.0	130	80
PBVDAPN16110F1L	110	4.9	130	60
PBVDAPN16125F1L	125	5.5	150	45
PBVDAPN16140F1L	140	6.2	160	35
PBVDAPN16160F1L	160	7.0	165	25
PBVDAPN16200F1L	200	8.8	180	*
PBVDAPN16225F1L	225	9.9	200	*
PBVDAPN16250F1L	250	11.0	210	*
PBVDAPN16280F1L	280	12.3	210	*

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



POWER-LOCK VDA® PN16 - 11° bend

Reference	D (mm)	S (mm)	Lb (mm)	Qty x pallet
PBVDAPN16315F1L	315	13.8	230	*
PBVDAPN16355F1L	355	15.6	250	*
PBVDAPN16400F1L	400	17,5	250	*

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

