


Pressure pipe PVC-U PN6 liscio

Tubo a pressione PVC-U PN6 liscio UNI EN ISO 1452-2, Grigio RAL 7011, lunghezza 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK® pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
 - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
 - **Coupling:** Forsheda 601 POWER-LOCK® Gasket
- **Reference standards**
 - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

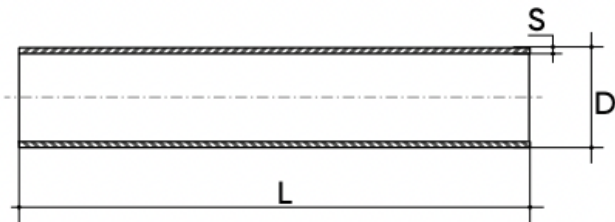

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV2604006L	40	1.5	0.29	275
PIPEV3305006L	50	1.6	0.39	194
PIPEV3306306L	63	2	0.60	123
PIPEV3307506L	75	2.3	0.83	87
PIPEV3309006L	90	2.8	1.15	96
PIPEV411006L	110	2.7	1.42	57
PIPEV4112506L	125	3.1	1.86	51
PIPEV4114006L	140	3.5	2.36	45
PIPEV4116006L	160	4	3.08	33
PIPEV4118006L	180	4.4	3.78	28
PIPEV4120006L	200	4.9	4.66	20
PIPEV4122506L	225	5.5	5.89	18

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations



Pressure pipe PVC-U PN6 liscio

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV4125006L	250	6.2	7.31	12
PIPEV4128006L	280	6.9	9.12	11
PIPEV4131506L	315	7.7	11.45	9
PIPEV4135506L	355	8.7	14.71	6
PIPEV4140006L	400	9.8	18.45	5
PIPEV4150006L	500	12.3	28.82	2

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

