


# Pressure pipe PVC-U PN10 liscio

Tubo a pressione PVC-U PN10 liscio UNI EN ISO 1452-2, Grigio RAL 7011, lunghezza 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK® pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
  - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
  - **Coupling:** Forsheda 601 POWER-LOCK® Gasket
- **Reference standards**
  - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
  - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
  - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

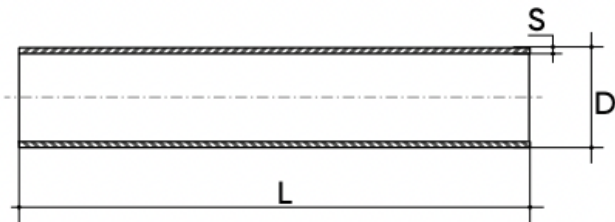

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV2103206L	32	1.6	0.24	449
PIPEV2104006L	40	1.9	0.36	275
PIPEV2105006L	50	2.4	0.56	194
PIPEV2106306L	63	3	0.89	123
PIPEV2107506L	75	3.6	1.24	87
PIPEV2109006L	90	4.3	1.78	96
PIPEV2611006L	110	4.2	2.15	57
PIPEV2612506L	125	4.8	2.77	51
PIPEV2614006L	140	5.4	3.54	45
PIPEV2616006L	160	6.2	4.61	33
PIPEV2618006L	180	6.9	5.78	28
PIPEV2620006L	200	7.7	7.16	20

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



## Pressure pipe PVC-U PN10 liscio

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV2622506L	225	8.6	8.99	18
PIPEV2625006L	250	9.6	11.14	12
PIPEV2628006L	280	10.7	13.88	11
PIPEV2631506L	315	12.1	17.61	9
PIPEV2635506L	355	13.6	22.33	6
PIPEV2640006L	400	15.3	28.23	5
PIPEV2650006L	500	19.1	43.91	2

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

