


Pressure pipe PVC-U PN10 forsheda

Tubo a pressione PVC-U PN10 UNI EN ISO 1452-2 Forsheda 601 Powerlock[®], Grigio RAL 7011, lunghezza 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK[®] pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
 - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
 - **Coupling:** Forsheda 601 POWER-LOCK[®] Gasket
- **Reference standards**
 - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

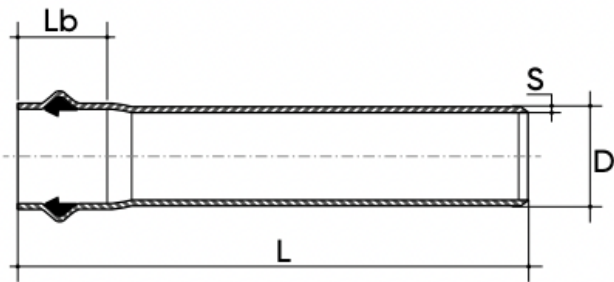

Reference	D (mm)	S (mm)	Lb (mm)	Weight (kg/m)	Qty x pallet
PIPEV21040S6L	40*	1.9	100	0.36	275
PIPEV21050S6L	50*	2.4	100	0.56	194
PIPEV21063F6L	63	3	110	0.89	123
PIPEV21075F6L	75	3.6	120	1.24	87
PIPEV21090F6L	90	4.3	130	1.78	96
PIPEV26110F6L	110	4.2	130	2.15	57
PIPEV26125F6L	125	4.8	150	2.77	51
PIPEV26140F6L	140	5.4	160	3.54	45
PIPEV26160F6L	160	6.2	165	4.61	33
PIPEV26180S6L	180	6.9	170	5.78	28
PIPEV26200F6L	200	7.7	180	7.16	20
PIPEV26225F6L	225	8.6	200	8.99	18
PIPEV26250F6L	250	9.6	210	11.14	12

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



Pressure pipe PVC-U PN10 forsheda

Reference	D (mm)	S (mm)	Lb (mm)	Weight (kg/m)	Qty x pallet
PIPEV26280F6L	280	10.7	210	13.88	11
PIPEV26315F6L	315	12.1	230	17.61	9
PIPEV26355F6L	355	13.6	250	22.33	6
PIPEV26400F6L	400	15.3	250	28.23	5
PIPEV26500F6L	500	19.1	255	43.91	2

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

