


Pressure pipe PVC-U PN12,5 forsheda

Tube a pressione PVC-U PN12,5 UNI EN ISO 1452-2 Forsheda 601 Powerlock[®], Grigio RAL 7011, lunghezza 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK[®] pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
 - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
 - **Coupling:** Forsheda 601 POWER-LOCK[®] Gasket
- **Reference standards**
 - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

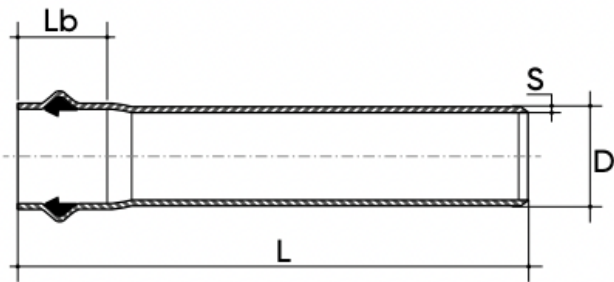

| Reference | D (mm) | S (mm) | Lb (mm) | Weight (kg/m) | Qty x pallet |
|---------------|--------|--------|---------|---------------|--------------|
| PIPEV21110F6L | 110 | 5.3 | 130 | 2.67 | 57 |
| PIPEV21125F6L | 125 | 6 | 150 | 3.41 | 51 |
| PIPEV21140F6L | 140 | 6.7 | 160 | 4.33 | 45 |
| PIPEV21160F6L | 160 | 7.7 | 165 | 5.67 | 33 |
| PIPEV21180S6L | 180** | 8.6* | 170 | 7.32 | 28 |
| PIPEV21200F6L | 200 | 9.6* | 180 | 8.81 | 20 |
| PIPEV21225F6L | 225 | 10.8* | 200 | 11.13 | 18 |
| PIPEV21250F6L | 250 | 11.9* | 210 | 13.62 | 12 |
| PIPEV21280F6L | 280 | 13.4* | 210 | 17.18 | 11 |
| PIPEV21315F6L | 315 | 15.0* | 230 | 21.59 | 9 |
| PIPEV21355F6L | 355 | 16.9* | 250 | 27.11 | 6 |
| PIPEV21400F6L | 400 | 19.1* | 250 | 34.77 | 5 |

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations