


Pressure pipe PVC-U PN20 liscio

Tubo a pressione PVC-U PN20 liscio UNI EN ISO 1452-2, Grigio RAL 7011, lunghezza 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK® pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
 - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
 - **Coupling:** Forsheda 601 POWER-LOCK® Gasket
- **Reference standards**
 - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

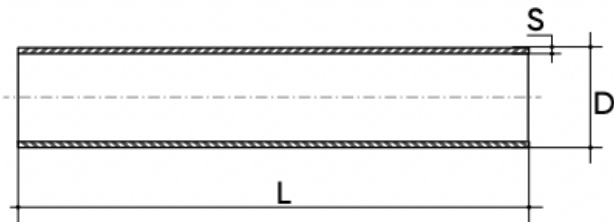

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV1101606L	16	1.5	0.109	Sfuso
PIPEV1102006L	20	1.9*	0.169	1166
PIPEV1102506L	25	2.3*	0.26	757
PIPEV1103206L	32	2.9*	0.41	449
PIPEV1104006L	40	3.7*	0.65	275
PIPEV1105006L	50	4.6*	1.00	194
PIPEV1106306L	63	5.8*	1.58	123
PIPEV1107506L	75	6.8*	2.21	87
PIPEV1109006L	90	8.2*	3.19	96
PIPEV1311006L	110	8.1*	3.94	57
PIPEV1312506L	125	9.2*	5.07	51
PIPEV1314006L	140	10.3*	6.43	45

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



Pressure pipe PVC-U PN20 liscio

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV1316006L	160	11.8*	8.40	33
PIPEV1320006L	200	14.7*	13.06	20
PIPEV1322506L	225	16.6*	16.53	18
PIPEV1325006L	250	18.4*	20.37	12

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

