


Pressure pipe PVC-U PN20 bicchierato

Tubo a pressione PVC-U PN20 bicchierato UNI EN ISO 1452-2, Grigio RAL 7011, lunghezza 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK® pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
 - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
 - **Coupling:** Forsheda 601 POWER-LOCK® Gasket
- **Reference standards**
 - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

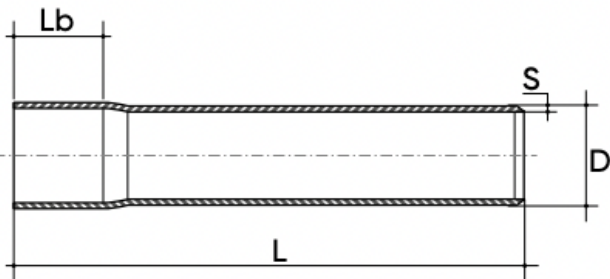

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV11016I6L	16	1.5	0.109	Sfuso
PIPEV11020I6L	20	1.9*	0.169	1166 37
PIPEV11025I6L	25	2.3*	0.26	757 40
PIPEV11032I6L	32	2.9*	0.41	449 65
PIPEV11040I6L	40	3.7*	0.65	275 70
PIPEV11050I6L	50	4.6*	1.00	194 85
PIPEV11063I6L	63	5.8*	1.58	123 90
PIPEV11075I6L	75	6.8*	2.21	87 105
PIPEV11090I6L	90	8.2*	3.19	96 130
PIPEV13110I6L	110	8.1*	3.94	57 140
PIPEV13125I6L	125	9.2*	5,07	51 150
PIPEV13140I6L	140	10.3*	6.43	45 165
PIPEV13160I6L	160	11.8*	8.40	33 175

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



Pressure pipe PVC-U PN20 bicchierato

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet	
PIPEV13200I6L	200	14.7*	13.06	20	200
PIPEV13225I6L	225	16.6*	16.53	18	215
PIPEV13250I6L	250	18.4*	20.37	12	200

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations

