


# Pressure pipe PN9/CLASS C

Pressure pipe PVC-U PN9/CLASS C BS-EN 1452, BS 3505, Grey RAL 7011, length 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK<sup>®</sup> pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
  - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
  - **Coupling:** Forsheda 601 POWER-LOCK<sup>®</sup> Gasket
- **Reference standards**
  - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
  - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
  - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

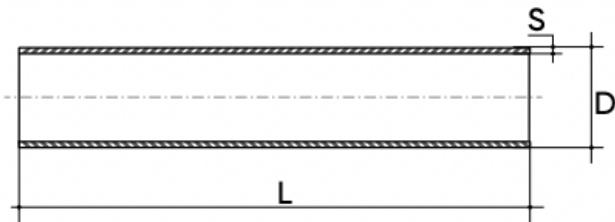

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEVBSC20006L	2"	2.5	0.73	252
PIPEVBSC21206L	2" 1/2	3	1.22	87
PIPEVBSC30006L	3"	3.5	1.48	96
PIPEVBSC40006L	4"	4.5	2.42	67
PIPEVBSC50006L	5"	5.5	3.63	45
PIPEVBSC60006L	6"	6.6	5.20	30
PIPEVBSC80006L	8"	7.8	8.05	18

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations