


FKOM/CP NC LUG ANSI - Pneumatically actuated butterfly valve DN 80:200

Pneumatically actuated butterfly valve ANSI 150 Lug version, Normally Closed.

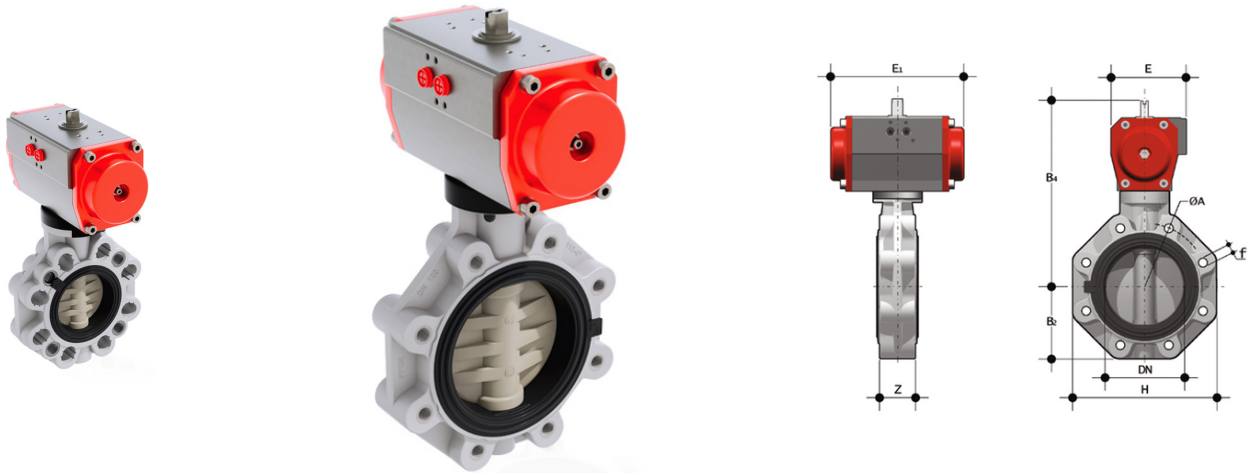

EPDM

Reference	d	DN	PN	B2	H	Z	ΦA	f	U	B ₄	E	E ₁	g
FKOALMNC300E	3"	80	10	93	185	49	152.4	5/8"	12	263	104	228	6900
FKOALMNC400E	4"	100	10	107	211	56	190.5	5/8"	8	292	120	280	9250
FKOALMNC500E	5"	125	10	120	240	64	215.9	3/4"	8	339	134	310	14350
FKOALMNC600E	6"	150	10	134	268	70	241.3	3/4"	8	352	134	310	15100
FKOALMNC800E	8"	200	10	161	323	71	298,4	3/4"	8	473	176	462	36800

FKM

Reference	d	DN	PN	B2	H	Z	ΦA	f	U	B ₄	E	E ₁	g
FKOALMNC300F	3"	80	10	93	185	49	152.4	5/8"	12	263	104	228	6900
FKOALMNC400F	4"	100	10	107	211	56	190.5	5/8"	8	292	120	280	9250
FKOALMNC500F	5"	125	10	120	240	64	215.9	3/4"	8	339	134	310	14350
FKOALMNC600F	6"	150	10	134	268	70	241.3	3/4"	8	352	134	310	15100
FKOALMNC800F	8"	200	10	161	323	71	298,4	3/4"	8	473	176	462	36800

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations